


P0731x SCREWLESS CONNECTORS 2, 3, and 5 wires

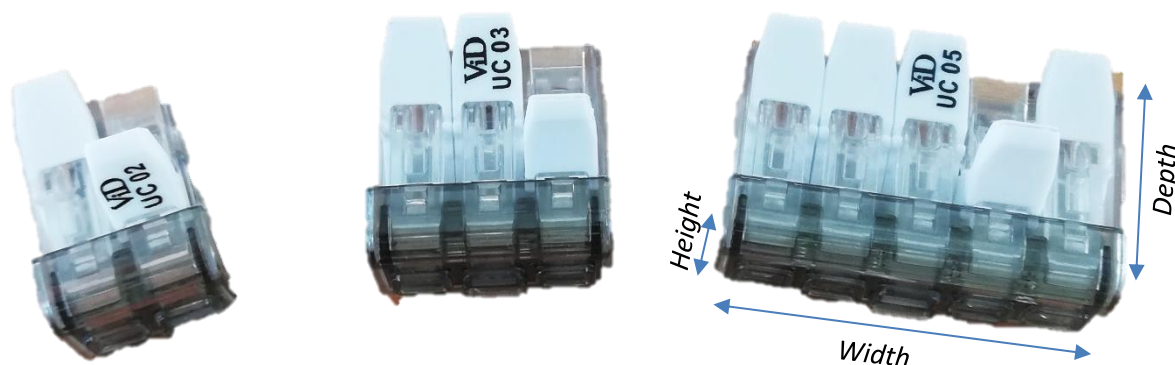

Presentation :

Art-Nr	Designation	Weight (g)	Dimensions (W x D x H in mm)
P07312	2 WIRE CONNECTOR	2.2	13 x 21 x 11
P07313	3 WIRE CONNECTOR	3.2	19 x 21 x 11
P07315	5 WIRE CONNECTOR	5.2	30 x 21 x 11

Main technical characteristics :

- Complies with NF EN 60998-1 and NF EN 60998-2-2
- Material : terminal bloc : transparent polycarbonate ; levers : white polyamide
- Material classification UL94 V2
- Certifications : VDE / CE / ENEC
- Adapted to solid and flexible wires, from 0.2 to 4mm²
- Strip length : 11mm
- Possibility to insert solid wires without opening levers (Push-in type)
- Max rated voltage 450V (AC/DC), Max rated current 32A
- Max continuous service temperature : 85°C
- With test point on back side
- RoHS compatible