

CLIP-TEC cable gland

Presse étoupe CLIP-TEC



PLASTIC STANDARD

IP PROTECTION :
IP 65

OPERATING TEMPERATURE :
-40 °C / +100 °C

SPECIAL FEATURES :

- Quick and easy to set up with a new clip system
- Perfect for installation in tight space or without back access
- No need to apply torque to tighten the body
- Wider clamping range
- Tool free assembly
- Recommended for different wall thickness : 1,5 to 2,7 mm

- Colors available :
- RAL 7035
 - RAL 7001
 - RAL 9005

MATERIAL :

- Body and cap nut : Polyamide 6
- Seal : neoprene
- O-ring : nitrile

SIZES :
Ø 16, Ø 20, Ø 25

CERTIFICATION :
IEC 62 444



INDICE DE PROTECTION :
IP 65

PLAGE DE TEMPÉRATURE :
-40 °C / +100 °C

AVANTAGES TECHNIQUES :

- Mise en place rapide grâce au système de clip
- Idéal pour les installations avec un accès restreint ou pas d'accès arrière
- Pas de couple de serrage nécessaire pour le corps
- Plage de serrage élargie
- Montage sans outil
- Recommandé pour des épaisseurs de parois de 1,5 à 2,7 mm



- Couleurs disponibles :
- RAL 7035
 - RAL 7001
 - RAL 9005

MATIÈRE :

- Corps et chapeau : Polyamide 6
- Garniture : néoprène
- Joint torique : nitrile

TAILLES :
Ø 16, Ø 20, Ø 25

CERTIFICATION :
IEC 62 444

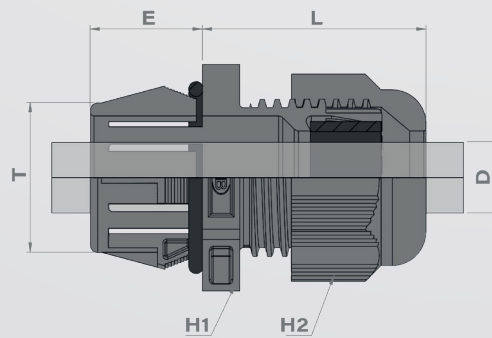

Metric equivalent	Thread T	Wall thickness F	Ø2 Ø of holes	Part Number			Sealin g	Clamping range D				Torques		H1	H2	Ø1	E	L	Packing
				RAL7035	RAL 7001	RAL 9005		mm		inch		Min	Max						
								Min	Max	Min	Max								
	16 ²	1,5 - 2,7	16,2 (+0,1/+0,2)	F7021612	F7021610	F8021605	Standard	3,5	10,0	0,138	0,394	4,0	2,5	24	22	27,4	15	28,0	50
	16 ²	1,5 - 2,7	16,2 (+0,1/+0,2)	F7021641	F7021653	F8021641	Reduced	2,0	7,0	0,079	0,276	1,6	2,0	24	22	27,4	15	28,0	50
	20	1,5 - 2,7	20,2 (+0,1/+0,2)	F7022053	F7022061	F8022054	Standard	7,0	12,0	0,276	0,472	2,5	2,5	27	24	30,3	15	29,0	50
	20	1,5 - 2,7	20,2 (+0,1/+0,2)	F7022062	F7022070	F8022061	Reduced	3,0	9,0	0,118	0,354	3,5	2,2	27	24	30,3	15	29,0	50
	25 ²	1,5 - 2,7	25,4 (+0,1/+0,2)	F7022506	F7022514	F8022503	Standard	9,0	18,0	0,354	0,709	3,8	4,8	33	33	38,0	15	37,0	25
	25 ²	1,5 - 2,7	25,4 (+0,1/+0,2)	F7022541	F7022553	F8022541	Reduced	7,0	16,0	0,276	0,630	4,0	2,8	33	33	38,0	15	37,0	25

Possibility of using a multi-holed sealing (see page 75) / Possibilité d'insérer une garniture multifilaire (voir page 75)