




UL SCREWLESS CONNECTORS with levers 2, 3 and 5 wires

P07302 / P07303 / P07305

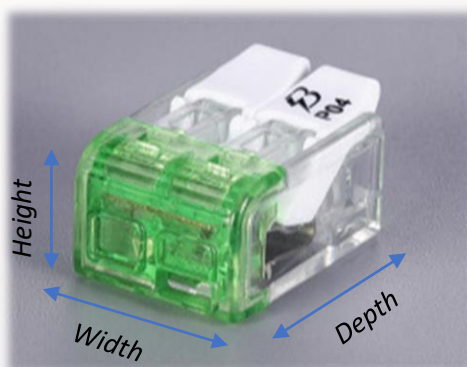

DESCRIPTION

Ref	Designation	Weight (g)	Dimensions (W x D x H)	
P07302	2 WIRES UL CONNECTOR WITH LEVERS	2,2	13 x 21 x 11 mm	0.51 x 0.83 x 0.43 in
P07303	3 WIRES UL CONNECTOR WITH LEVERS	3,3	19 x 21 x 11 mm	0.75 x 0.83 x 0.43 in
P07305	5 WIRES UL CONNECTOR WITH LEVERS	5,3	30 x 21 x 11 mm	1.18 x 0.83 x 0.43 in

MAIN TECHNICAL CHARACTERISTICS

- Complies with UL 486C with copper cables
- Material : terminal bloc : transparent polycarbonate ; levers : white polyamid
- Material classification UL94 V2
- Certifications : UL listed, certificate n°20170224-E332489
- Adapted to solid and flexible wires, up to 4mm² ; 24-12 AWG.
- Strip length: 13mm
- Possibility to insert solid wires without opening levers (Push-in type)
- Max rated voltage 600V (AC/DC), Max rated current 30A
- Working service temperature : -4°F to 212F (-20°C to 100°C)
- With test point on back side
- RoHS compatible

PACKAGING INFORMATION

Ref	Pieces/Box	Pieces/Cardboard	Pieces/Pallet
P07302	100	6000	168000
P07303	50	3000	84000
P07305	25	1500	42000

