

WADI-TEC with multi-holed seal cable gland

Presse étoupe **WADI-TEC** garniture multifilaire



BRASS STANDARD

IP PROTECTION :

IP 68

OPERATING**TEMPERATURE :**

-25 °C / +120 °C

SPECIAL FEATURES :

- Allows the passage of several cables
- O-ring
- Sealing close

MATERIAL :

- Nickel-plated brass
- Stainless steel 316L-1.4404-V4A on request
- Seal : TPE
- O-ring : nitrile

THREAD :

Metric, PG

CERTIFICATION :

IEC 62 444

ACCESSORIES**AVAILABLE :**

See accessories

BRASS

FOR
ROUND
CABLES

MODULAR

INDICE DE PROTECTION :

IP 68

PLAGE DE**TEMPÉRATURE :**

-25 °C / +120 °C

AVANTAGES**TECHNIQUES :**

- Permet le passage de plusieurs câbles
- Joint torique
- Garniture obturée

MATIÈRE :

- Laiton nickelé
- Inox 316L-1.4404-V4A sur demande
- Garniture : TPE
- Joint torique : nitrile

FILETAGE :

Métrique, PG

CERTIFICATION :

IEC 62 444

ACCESSOIRES**DISPONIBLES :**

Voir page des accessoires

Sealing close / Garniture obturée


Sealings available / Garnitures disponibles



Version Ex e available on request / Disponible en version Ex e sur demande

	Thread T	Part Number	Number of entries	Ø of passage D	H1	H2	E	L	Packing
PG	07	R0700701	1	5,0	14	14	5,0	19,0	50
	09	R0700900	1	5,0	17	17	6,0	19,0	50
	09	R0700902	2	3,0	17	17	6,0	19,0	50
	09	R0700903	2	3,5	17	17	6,0	19,0	50
	09	R0700905	3	3,0	17	17	6,0	19,0	50
	09	R0700906	4	3,0	20	20	6,0	20,0	50
	09	R0700907	4	4,0	20	20	6,0	20,0	50
	11	R0701113	2	5,0	20	20	6,0	20,0	50
	11	R0701114	2	6,0	20	20	6,5	23,5	50
	11	R0701106	3	3,0	20	20	6,0	20,0	50
	11	R0701115	3	5,0	22	22	6,5	23,5	50
	11	R0701110	4	3,5	20	20	6,0	20,0	50
	11	R0701111	6	2,0	20	20	6,0	20,0	50
	13	R0701300	2	6,0	22	22	6,5	21,5	50
	13	R0701307	3	6,0	24	24	6,5	23,5	50
	13	R0701308	4	3,0	22	22	6,5	21,5	50
	13	R0701311	4	5,0	24	24	6,5	23,5	50
	13	R0701312	6	3,5	22	22	6,5	21,5	50
	16	R0701603	2	5,0	24	24	6,5	23,5	50
	16	R0701604	2	6,0	24	24	6,5	23,5	50
	16	R0701600	2	7,0	24	24	6,5	23,5	50
	16	R0701605	2	8,0	30	30	7,0	28,0	50
	16	R0701606	2	9,0	30	30	7,0	23,0	50
	16	R0701608	3	4,0	24	24	6,5	23,5	50
	16	R0701612	4	4,0	24	24	6,5	23,5	50
	16	R0701614	5	4,0	24	24	6,5	23,5	50
	21	R0702107	2	8,0	30	30	7,0	28,0	20
	21	R0702110	2	11,0	40	40	7,0	36,0	20
	21	R0702105	3	7,0	30	30	7,0	28,0	20
	21	R0702102	3	8,0	30	30	7,0	28,0	20
	21	R0702100	4	6,0	30	30	7,0	28,0	20
	21	R0702114	5	5,0	30	30	7,0	28,0	20
	21	R0702103	5	6,5	30	30	7,0	28,0	20
	21	R0702104	8	5,0	30	30	7,0	28,0	20
	29	R0702909	2	11,0	40	40	8,0	35,0	20
	29	R0702910	2	12,0	40	40	8,0	35,0	20
	29	R0702911	3	9,0	40	40	8,0	35,0	20
	29	R0702912	3	11,0	40	40	8,0	35,0	20
	29	R0702900	4	8,0	40	40	8,0	35,0	20
	29	R0702913	4	9,0	40	40	8,0	35,0	20
	29	R0702902	7	6,0	40	40	8,0	35,0	20
	29	R0702907	11	5,0	40	40	8,0	35,0	20

Dimension in millimeters

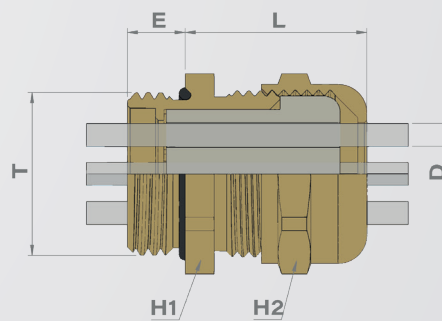

	Thread T	Part Number	Number of entries	Ø of passage D	H1	H2	E	L	Packing
	16	R0721601	2	3,0	17	17	7,0	20,0	50
	16	R0721603	2	4,0	17	17	7,0	20,0	50
	16	R0721604	3	3,0	17	17	7,0	20,0	50
	20	R0722000	2	2,3	20	22	7,0	21,0	50
	20	R0722001	2	3,0	22	22	7,0	22,0	50
	20	R0722003	2	4,0	20	22	7,0	21,0	50
	20	R0722004	2	5,0	22	22	7,0	22,0	50
	20	R0722005	2	6,0	22	22	7,0	22,0	50
	20	R0722009	3	4,0	22	22	7,0	22,0	50
	20	R0722010	3	5,3	22	22	7,0	22,0	50
	20	R0722012	4	1,5	20	22	7,0	21,0	50
	20	R0722013	4	3,0	22	22	7,0	22,0	50
	20	R0722014	4	3,5	20	22	7,0	21,0	50
	20	R0722015	4	4,0	22	22	7,0	22,0	50
	20	R0722016	6	2,0	20	22	7,0	21,0	50
	20	R0722017	6	2,5	20	22	7,0	21,0	50
	20	R0722018	6	3,5	22	22	7,0	22,0	50
	20	R0722019	10	2,0	22	22	7,0	22,0	50
	25	R0722501	2	4,5	30	30	8,0	29,0	20
	25	R0722502	2	5,0	24	26	8,0	23,0	20
	25	R0722503	2	6,0	24	26	8,0	23,0	20
	25	R0722504	2	7,0	24	26	8,0	23,0	20
	25	R0722505	2	8,0	30	30	8,0	29,0	20
	25	R0722507	3	4,0	24	26	8,0	23,0	20
	25	R0722508	3	5,0	24	26	8,0	23,0	20
	25	R0722509	3	5,6	24	26	8,0	23,0	20
	25	R0722510	3	6,0	24	26	8,0	23,0	20
	25	R0722511	3	7,0	30	30	8,0	29,0	25
	25	R0722512	3	8,0	30	30	8,0	29,0	25
	25	R0722513	4	4,0	24	26	8,0	23,0	20
	25	R0722514	4	5,0	30	30	8,0	29,0	20
	25	R0722515	4	6,0	30	30	8,0	29,0	20
	25	R0722517	5	5,0	30	30	8,0	29,0	20
	25	R0722518	5	6,0	30	30	8,0	29,0	20
	25	R0722519	5	6,5	30	30	8,0	29,0	20
	25	R0722520	6	4,0	30	30	8,0	29,0	20
	25	R0722521	6	5,0	30	30	8,0	29,0	20
	25	R0722522	8	4,0	30	30	8,0	29,0	20
	25	R0722523	8	5,0	30	30	8,0	29,0	20
	32	R0723201	2	8,0	30	33	8,5	36,5	20
	32	R0723202	2	9,0	40	40	8,5	36,5	20
	32	R0723203	2	11,0	40	40	8,5	36,5	20
	32	R0723204	2	12,0	40	40	8,5	36,5	20
	32	R0723205	3	7,0	30	33	8,5	29,5	20
	32	R0723206	3	8,0	30	33	8,5	29,5	20
	32	R0723207	3	9,0	40	40	8,5	36,5	20
	32	R0723208	3	11,0	40	40	8,5	36,5	20
	32	R0723209	4	5,0	30	33	8,5	29,5	20
	32	R0723211	4	8,0	40	40	8,5	36,5	20
	32	R0723212	4	9,0	40	40	8,5	36,5	20
	32	R0723213	4	10,0	40	40	8,5	36,5	20
	32	R0723215	5	6,0	30	33	8,5	29,5	20
	32	R0723216	5	6,5	30	33	8,5	29,5	20
	32	R0723218	6	5,0	30	33	8,5	29,5	20
	32	R0723219	6	6,0	40	40	8,5	36,5	20
	32	R0723220	6	6,5	40	40	8,5	36,5	20
	32	R0723221	6	7,0	40	40	8,5	36,5	20
	32	R0723222	7	6,0	40	40	8,5	36,5	20
	32	R0723223	7	7,0	40	40	8,5	36,5	20
	32	R0723226	8	6,0	40	40	8,5	36,5	20

Dimension in millimeters