

WADI-TEC with multi-holed seal cable gland

Presse étoupe **WADI-TEC** garniture multifilaire



PLASTIC STANDARD

IP PROTECTION :

IP 68

OPERATING**TEMPERATURE :**

-25 °C / +120 °C

SPECIAL FEATURES :

- Sealing close
- Free of halogen
- Specific for variant sealing
- Colors available :
 - RAL 7035
 - RAL 9005
 - RAL 7001 on request

MATERIAL :

- Polyamide 6 glassfiber 25% reinforced
- Seal : TPE

THREAD :

Metric, PG

CERTIFICATION :

IEC 62 444

ACCESSORIES**AVAILABLE :**

See accessories

**INDICE DE PROTECTION :**

IP 68

PLAGE DE**TEMPÉRATURE :**

-25 °C / +120 °C

AVANTAGES**TECHNIQUES :**

- Garniture obturée
- 0 halogène
- Spécifique pour le passage de plusieurs câbles
- Couleurs disponibles :
 - RAL 7035
 - RAL 9005
 - RAL 7001 sur demande

MATIÈRE :

- Polyamide 6 chargé 25 % fibre de verre
- Garniture : TPE

FILETAGE :

Métrique, PG

CERTIFICATION :

IEC 62 444


ACCESSOIRES**DISPONIBLES :**

Voir page des accessoires

Version Ex e available on request / Disponible en version Ex e sur demande


	Thread T	Part Number		Number of entries	Diameter D	H	E	L	Packing
		RAL 7035	RAL 9005						
Metric	16	Z6721601	Z7721601	2	3,0	19	8,0	32,0	50
	16	Z6721604	Z7721604	3	3,0	19	8,0	32,0	50
	20	Z6722000	Z7722000	2	3,0	24	9,0	36,0	50
	20	Z6722002	Z7722002	2	5,0	27	9,0	39,0	50
	20	Z6722003	Z7722003	2	6,0	27	9,0	39,0	50
	20	Z6722004	Z7722004	2	7,0	27	9,0	39,0	50
	20	Z6722006	Z7722006	3	3,0	27	9,0	39,0	50
	20	Z6722007	Z7722007	3	4,0	27	9,0	39,0	50
	20	Z6722008	Z7722008	3	5,0	27	9,0	39,0	50
	20	Z6722009	Z7722009	3	5,6	27	9,0	39,0	50
	20	Z6722010	Z7722010	3	6,0	27	9,0	39,0	50
	20	Z6722011	Z7722011	4	3,0	24	9,0	36,0	50
	20	Z6722012	Z7722012	4	4,0	27	9,0	39,0	50
	20	Z6722013	Z7722013	5	4,0	27	9,0	39,0	50
	20	Z6722014	Z7722014	5	5,0	27	9,0	39,0	50
	20	Z6722015	Z7722015	6	3,5	24	9,0	36,0	50
	20	Z6722016	Z7722016	6	4,0	27	9,0	39,0	50
	20	Z6722017	Z7722017	10	2,0	24	9,0	36,0	50
	25	Z6722500	Z7722500	2	4,5	33	11,0	44,0	20
	25	Z6722501	Z7722501	2	8,0	33	11,0	44,0	20
	25	Z6722502	Z7722502	3	7,0	33	11,0	44,0	20
	25	Z6722503	Z7722503	3	8,0	33	11,0	44,0	20
	25	Z6722504	Z7722504	4	5,0	33	11,0	44,0	20
	25	Z6722505	Z7722505	4	6,0	33	11,0	44,0	20
	25	Z6722506	Z7722506	5	5,0	33	11,0	44,0	20
	25	Z6722507	Z7722507	5	6,0	33	11,0	44,0	20
	25	Z6722508	Z7722508	5	6,5	33	11,0	44,0	20
	25	Z6722509	Z7722509	6	4,0	33	11,0	44,0	20
	25	Z6722510	Z7722510	6	5,0	33	11,0	44,0	20
	25	Z6722512	Z7722512	8	5,0	33	11,0	44,0	20
	25	Z6722513	Z7722513	21	2,0	33	11,0	44,0	20
	32	Z6723200	Z7723200	2	9,0	42	12,0	55,0	20
	32	Z6723201	Z7723201	2	11,0	42	12,0	55,0	20
	32	Z6723202	Z7723202	2	12,0	42	12,0	55,0	20
	32	Z6723203	Z7723203	3	9,0	42	12,0	55,0	20
	32	Z6723204	Z7723204	3	11,0	42	12,0	55,0	20
	32	Z6723205	Z7723205	4	8,0	42	12,0	55,0	20
	32	Z6723206	Z7723206	4	9,0	42	12,0	55,0	20
	32	Z6723207	Z7723207	4	10,0	42	12,0	55,0	20
	32	Z6723208	Z7723208	6	6,0	42	12,0	55,0	20
	32	Z6723209	Z7723209	6	6,5	42	12,0	55,0	20
	32	Z6723210	Z7723210	6	7,0	42	12,0	55,0	20
	32	Z6723212	Z7723212	7	7,0	42	12,0	55,0	20
	32	Z6723213	Z7723213	8	5,0	42	12,0	55,0	20
	32	Z6723214	Z7723214	8	6,0	42	12,0	55,0	20
	32	Z6723215	Z7723215	10	6,0	42	12,0	55,0	20
	32	Z6723216	Z7723216	11	5,0	42	12,0	55,0	20

Dimension in millimeters

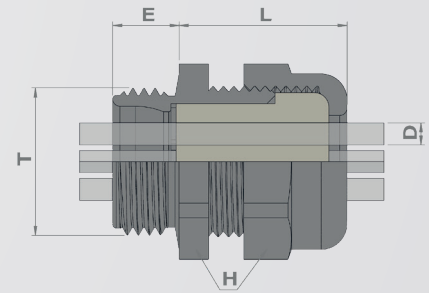

Sealing close / Garniture obturée

Sealing available / Garnitures disponibles



	Thread T	Part Number		Number of entries	Diameter D	H	E	L	Packing
		RAL 7035	RAL 9005						
PG	07	Z6700701	Z7700701	1	5,0	15	8,0	31,0	50
	09	Z6700902	Z7700902	2	3,0	19	8,0	32,0	50
	09	Z6700903	Z7700903	2	3,5	19	8,0	32,0	50
	09	Z6700906	Z7700906	4	3,0	22	8,0	34,0	50
	11	Z6701103	Z7701103	2	2,3	22	8,0	35,0	50
	11	Z6701100	Z7701100	2	3,5	22	8,0	35,0	50
	11	Z6701105	Z7701105	2	4,0	22	8,0	38,0	50
	11	Z6701102	Z7701102	2	5,0	22	8,0	35,0	50
	11	Z6701120	Z7701120	2	6,0	27	8,0	38,0	50
	11	Z6701121	Z7701121	3	5,0	27	8,0	38,0	50
	11	Z6701111	Z7701111	6	2,0	22	8,0	35,0	50
	13	Z6701302	Z7701302	2	5,0	24	11,0	36,0	50
	13	Z6701300	Z7701300	2	6,0	24	11,0	36,0	50
	13	Z6701307	Z7701307	3	6,0	27	11,0	38,0	50
	13	Z6701311	Z7701311	4	5,0	27	11,0	38,0	50
	13	Z6701312	Z7701312	6	3,5	24	11,0	36,0	50
	13	Z6701313	Z7701313	10	2,0	24	11,0	36,0	50
	16	Z6701604	Z7701604	2	6,0	27	10,0	42,0	50
	16	Z6701600	Z7701600	2	7,0	27	10,0	40,0	50
	16	Z6701606	Z7701606	2	9,0	27	10,0	40,0	50
	16	Z6701611	Z7701611	3	6,0	33	10,0	42,0	50
	16	Z6701612	Z7701612	3	8,0	33	10,0	42,0	50
	16	Z6701620	-	4	5,0	33	10,0	42,0	50
	16	Z6701619	Z7701619	4	6,0	33	10,0	40,0	50
	16	Z6701615	Z7701615	5	4,0	33	10,0	42,0	50
	16	Z6701616	Z7701616	5	5,0	27	10,0	40,0	50
	21	Z6702106	Z7702106	2	4,5	33	11,0	44,0	20
	21	Z6702107	Z7702107	2	8,0	42	11,0	48,0	20
	21	Z6702117	Z7702117	2	11,0	42	11,0	48,0	20
	21	Z6702105	Z7702105	3	7,0	33	11,0	44,0	20
	21	Z6702118	Z7702118	3	9,0	42	11,0	48,0	20
	21	Z6702100	Z7702100	4	6,0	33	11,0	44,0	20
	21	Z6702120	Z7702120	4	7,5	42	11,0	48,0	20
	21	Z6702111	Z7702111	4	8,0	42	11,0	48,0	20
	21	Z6702102	Z7702102	5	6,0	42	11,0	48,0	20
	21	Z6702104	Z7702104	5	6,5	42	11,0	48,0	20
	21	Z6702122	Z7702122	6	4,0	33	11,0	44,0	20
	21	Z6702123	Z7702123	6	5,0	42	11,0	48,0	20
	21	Z6702115	Z7702115	6	6,0	42	11,0	48,0	20
	21	Z6702110	Z7702110	6	6,5	42	11,0	48,0	20
	21	Z6702114	Z7702114	6	7,0	33	11,0	44,0	20
	21	Z6702128	-	8	4,0	33	11,0	44,0	20
	21	Z6702101	Z7702101	8	5,0	33	11,0	44,0	20
	21	Z6702113	Z7702113	11	5,0	33	11,0	44,0	20
	21	Z6702112	Z7702112	28	3,0	42	11,0	44,0	20
	29	Z6702910	Z7702910	2	12,0	42	12,0	48,0	20
	29	Z6702903	Z7702903	4	8,0	42	12,0	48,0	20
	29	Z6702913	Z7702913	4	9,0	42	12,0	48,0	20
	29	Z6702914	Z7702914	4	10,0	42	12,0	48,0	20
	29	Z6702900	Z7702900	6	6,5	42	12,0	48,0	20
	29	Z6702907	Z7702907	6	7,0	42	12,0	48,0	20
	29	Z6702902	Z7702902	7	6,0	42	12,0	48,0	20
	29	Z6702915	Z7702915	7	7,0	42	12,0	48,0	20
	29	Z6702916	Z7702916	8	5,0	42	12,0	48,0	20
	29	Z6702904	Z7702904	8	6,0	42	12,0	48,0	20
	29	Z6702917	Z7702917	10	6,0	42	12,0	48,0	20
	29	Z6702906	Z7702906	11	5,0	42	12,0	48,0	20

Dimension in millimeters